

FIG. 1

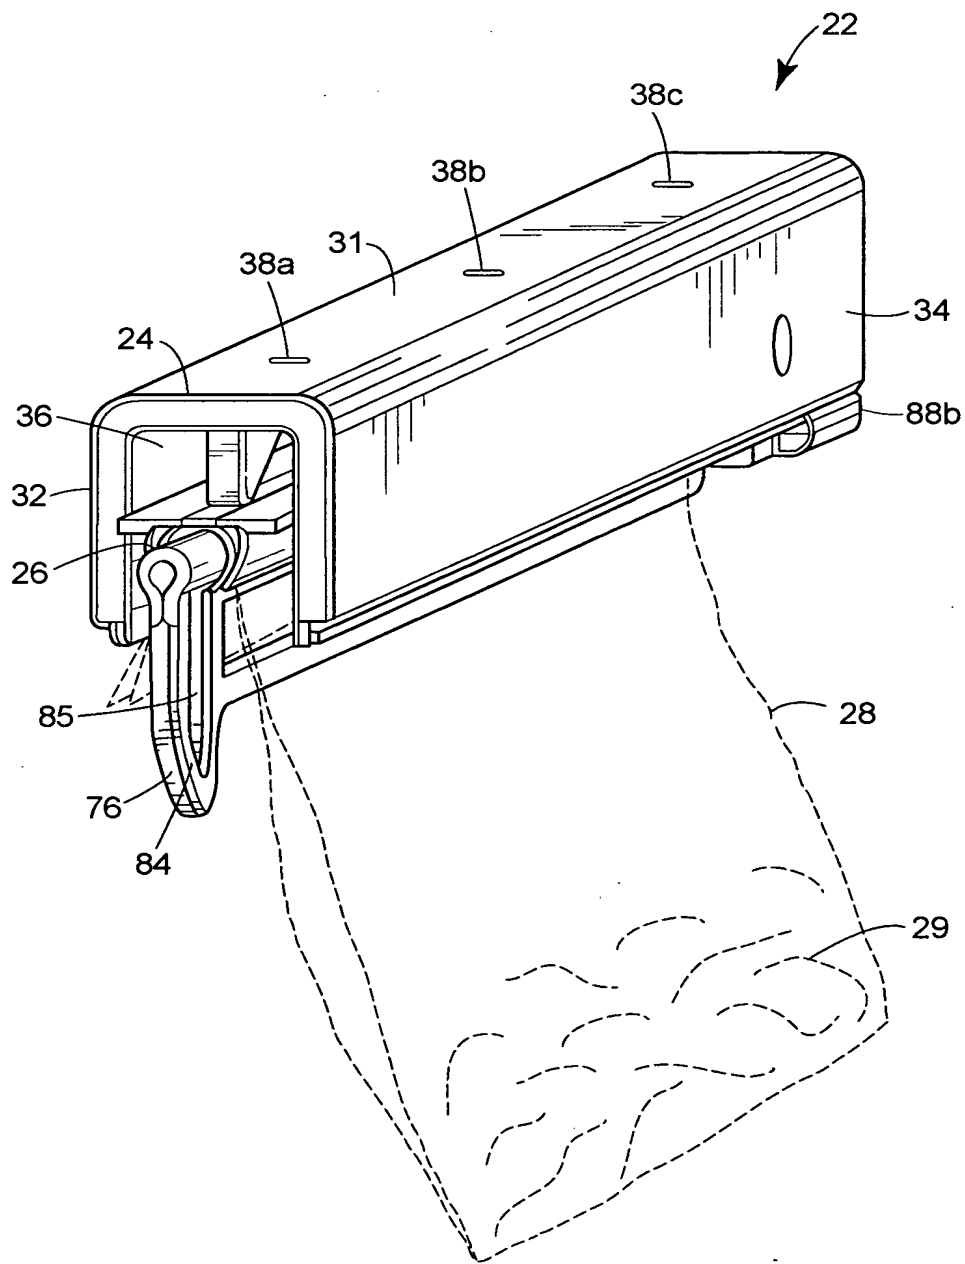


FIG. 1A

FIG. 1A is a perspective view of a rectangular box 150. A bottom rail assembly 22 is attached to the bottom edge of the box. The rail assembly includes a base 34 and a sliding component 36. A locking mechanism 26 is shown in a locked position, with a key 84 inserted into a lock cylinder 85. A dashed line 28 indicates the path of the key, and a dashed line 29 indicates the path of the key's insertion.

[illegible]

FIG.2

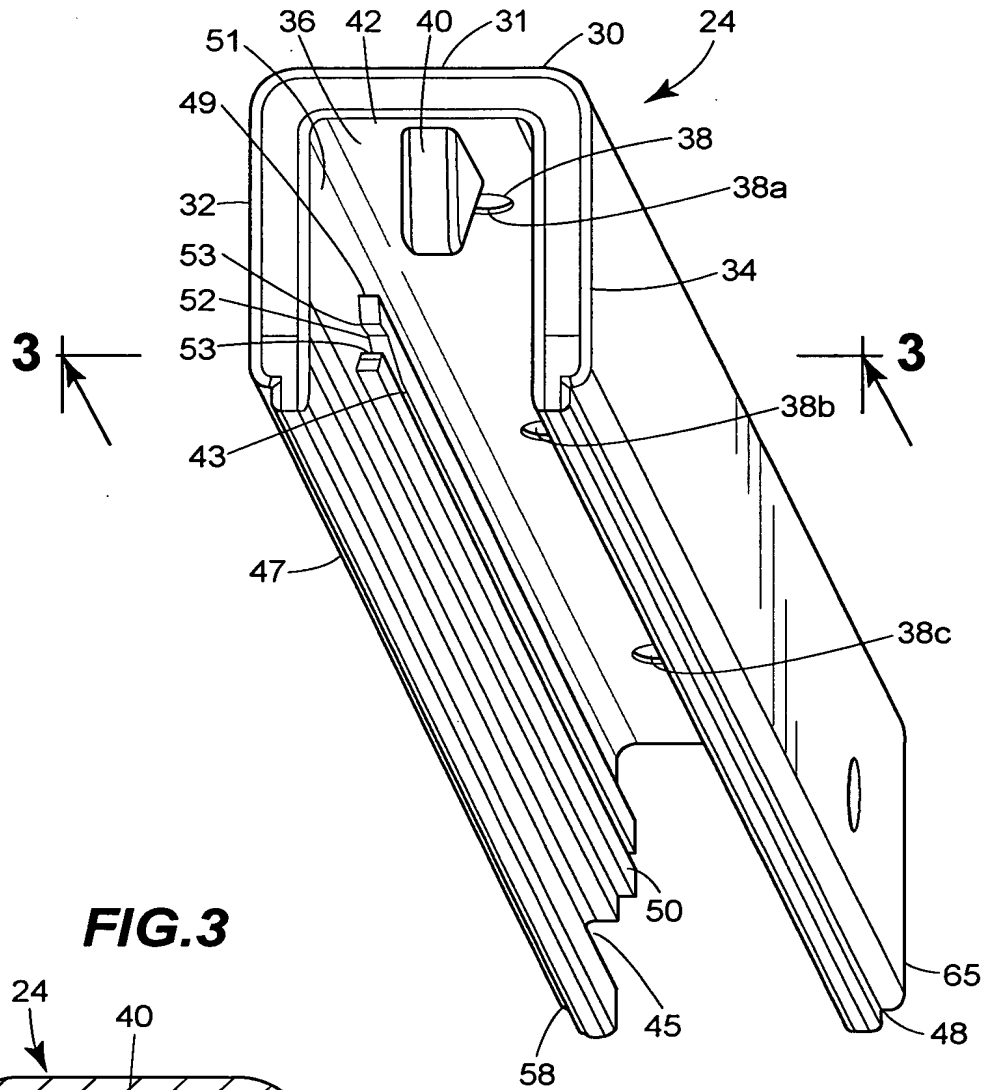


FIG.3

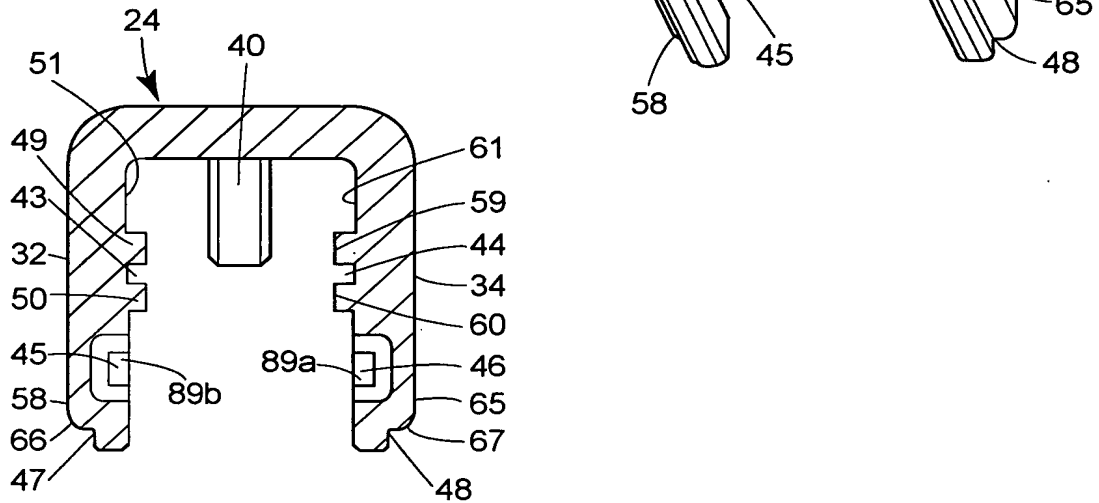
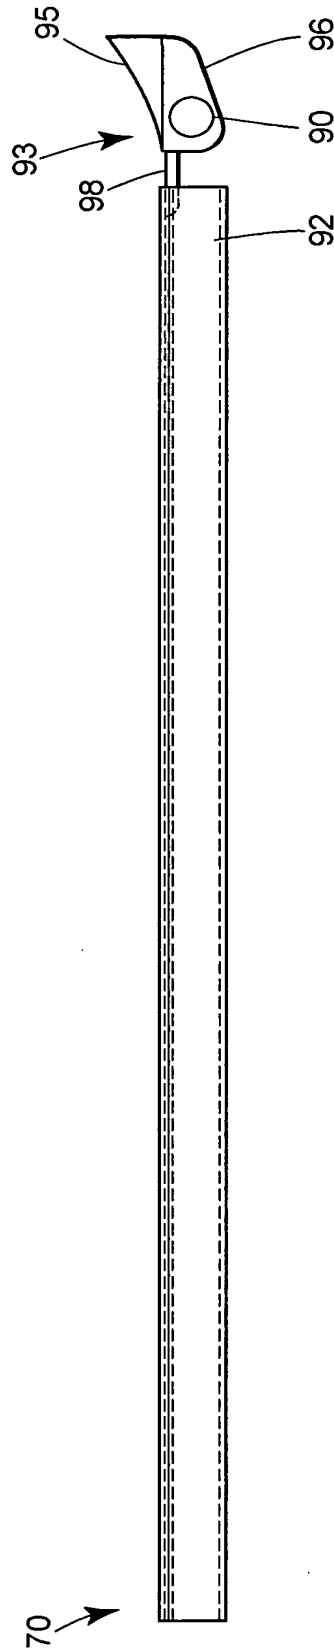


FIG. 8



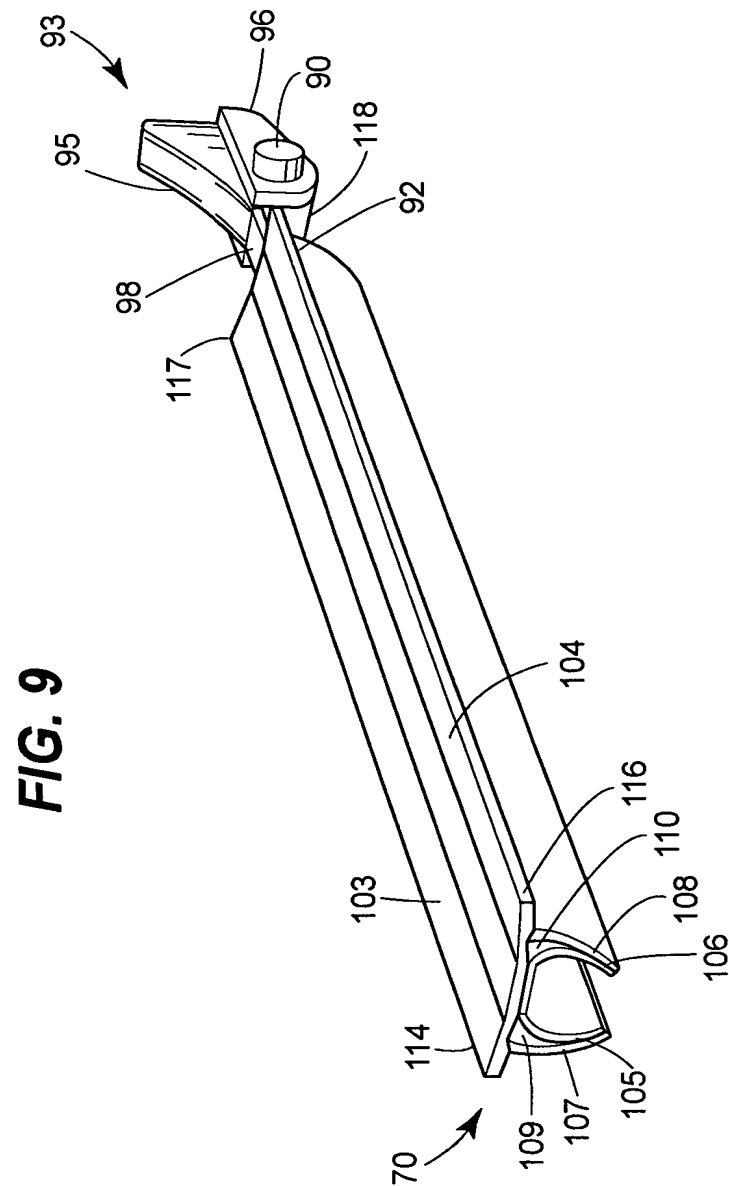


FIG. 11

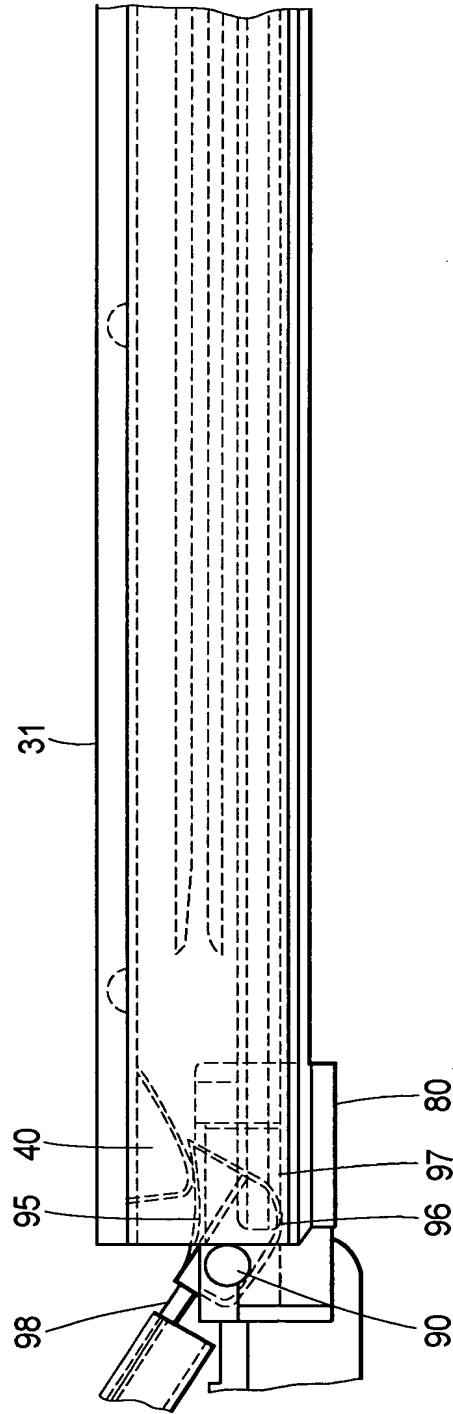


FIG. 13

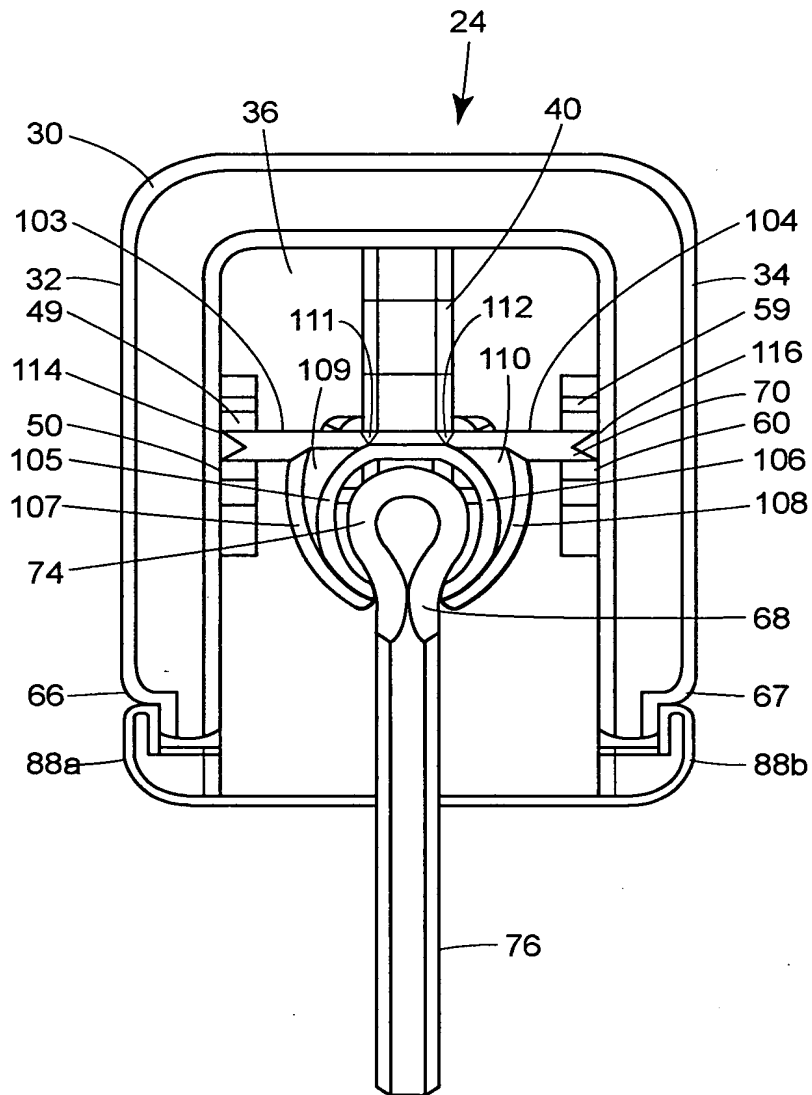


FIG. 15

